AMAZE Grade 1 - Panel Fabric

Trendway

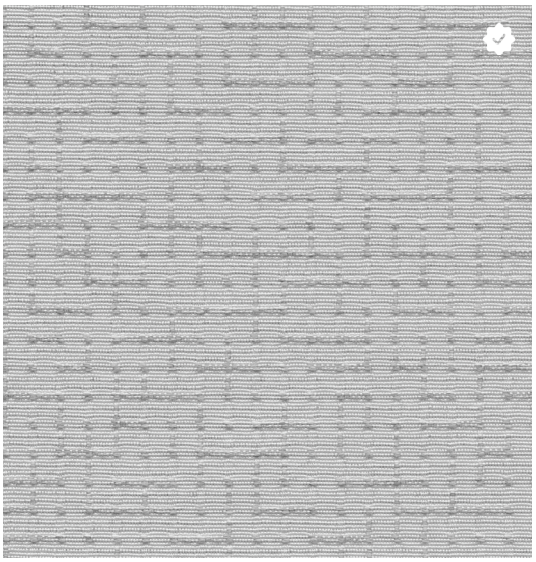

Platinum - Z4T

Morel - Z4W



Sky - Z4U

Steel - Z4V

* = Trendway Standard Fabric

AMAZE

Application	Vertical Surface Fabrics
Grade	1
Pattern	Directional
Content	82% polyester, 18% post-consumer recycled polyester
Weight	12.9 ± 1.0 oz. per linear yard
Width	66″ min. useable
Colorfastness to Light	Grade 4 min. at 40 hours
Colorfastness to Crocking	Grade 4 min. dry & Grade 3 min. wet
Flammability Rating	ASTM E84 Class I or A
UL Listed	Meets UL requirements
Note	Color may vary slightly between manufacturer's dye lots
Care Instructions	Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.